



**FIXING
WHAT
MATTERS**

 **BOSSONG**

ABSTRACT 2020

E-PLUS

RESINA EPOSSIDICA PURA
SENZA STIRENE
PURE EPOXY RESIN
STYRENE FREE

BCR 1000 E-PLUS

cod. 747490 | 1000 ml

Cartuccia shuttle
Shuttle cartridge



BCR 585 E-PLUS

cod. 747485 | 585 ml

Cartuccia shuttle
Shuttle cartridge






BCR 385 E-PLUS

cod. 747460 | 385 ml

Cartuccia shuttle
Shuttle cartridge



Prodotto per uso strutturale
Product for structural applications

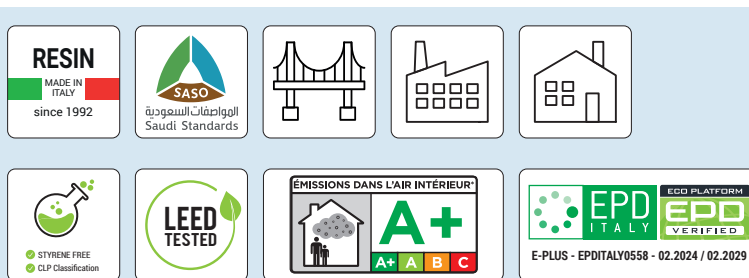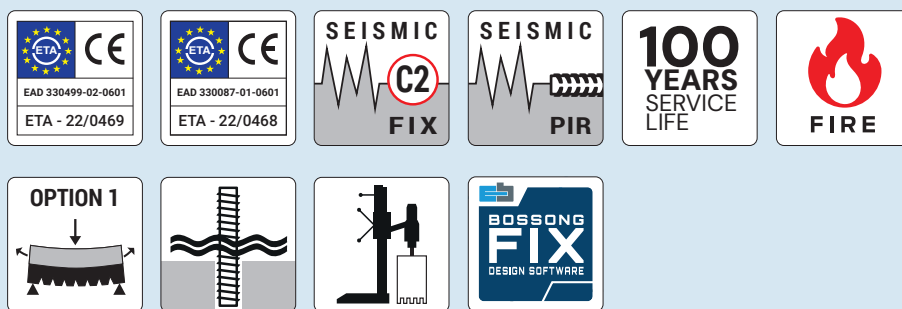


20°C

OPEN TIME 30 min

CURING TIME 12 h

STOCCAGGIO E CONSERVAZIONE
STORAGE AND CONSERVATION



CARTUCCIA
CARTRIDGE



V-PLUS

RESINA VINILESTERE
SENZA STIRENE
VINYLESTER RESIN
STYRENE FREE

BCR 400 V-PLUS

cod. 747280 | 400 ml

Cartuccia coassiale
Coaxial cartridge



BCR 300 V-PLUS

cod. 747260 | 300 ml

Cartuccia sacchetto
Foil cartridge



BCR 165 V-PLUS

cod. 747250 | 165 ml

Cartuccia sacchetto
Foil cartridge



BCR 400 WINTER

cod. 747274 | 400 ml

Cartuccia coassiale
Coaxial cartridge



BCR 400 TROPICAL

cod. 747276 | 400 ml


Cartuccia coassiale
Coaxial cartridge






20°C

OPEN TIME 7 min 30"


CURING TIME 40 min



Prodotto per uso strutturale
Product for structural applications

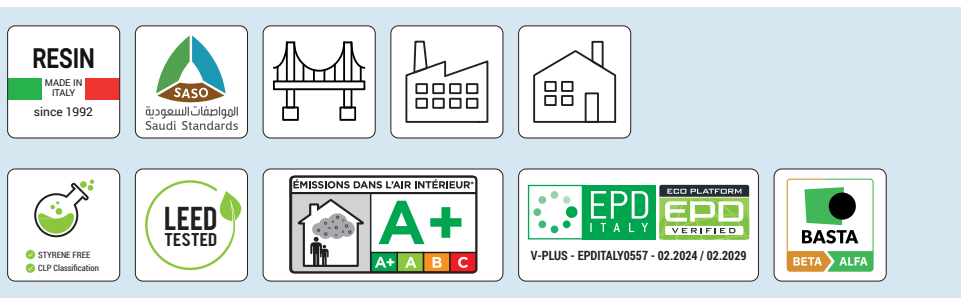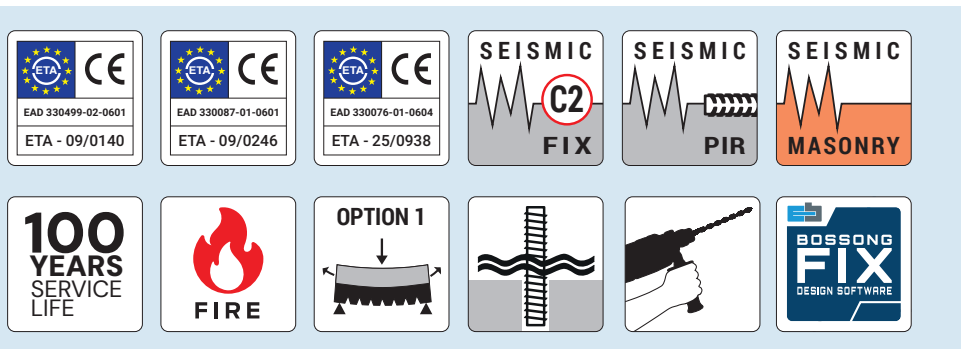

STOCCAGGIO E CONSERVAZIONE
STORAGE AND CONSERVATION



CARTUCCIA
CARTRIDGE



Prodotto su richiesta, ordini programmati
legati a quantità MINIME
On demand product; order planning required
in connection with specific quantities

HYBRID

RESINA IBRIDA
SENZA STIRENE
HYBRID RESIN
STYRENE FREE

Prodotto per uso strutturale
Product for structural applications

BCR 400 HYBRID

cod. 747980 | 400 ml

Cartuccia coassiale
Coaxial cartridge



BCR 300 HYBRID

cod. 747960 | 300 ml

Cartuccia sacchetto
Foil cartridge





⚠ BCR 165 HYBRID

cod. 747920 | 165 ml

Cartuccia sacchetto
Foil cartridge



⚠ Prodotto su richiesta, ordini programmati legati a quantità MINIME
On demand product; order planning required in connection with specific quantities

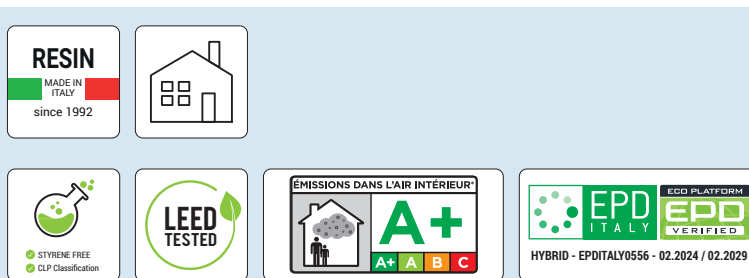



20°C

OPEN TIME 6 min

CURING TIME 45 min

STOCCAGGIO E CONSERVAZIONE
STORAGE AND CONSERVATION



CARTUCCIA
CARTRIDGE



POLY SF

RESINA POLIESTERE
SENZA STIRENE
POLYESTER RESIN
STYRENE FREE

BCR 400 POLY SF

cod. 747176 | 400 ml

Cartuccia coassiale
Coaxial cartridge



BCR 300 POLY SF

cod. 747138 | 300 ml

Cartuccia sacchetto
Foil cartridge



! BCR 165 POLY SF

cod. 747122 | 165 ml

Cartuccia sacchetto
Foil cartridge



! BCR 400 POLY SF-TP

cod. 747169 | 400 ml

Cartuccia coassiale
Coaxial cartridge



! BCR 300 POLY SF-TP

cod. 747144 | 300 ml


Cartuccia sacchetto
Foil cartridge



20°C




OPEN TIME 6 min

CURING TIME 45 min




available for
BCR-400
BCR-300

! Prodotto su richiesta, ordini programmati
legati a quantità MINIME
On demand product; order planning
required in connection with specific
quantities





















STOCCAGGIO E CONSERVAZIONE
STORAGE AND CONSERVATION



CARTUCCIA
CARTRIDGE



	E-PLUS	V-PLUS WINTER TROPICAL	HYBRID	POLY SF
 	 	 	 	 
SIZE	1000 - 585 - 385 ml	400 - 300 - 165 ml	400 - 300 - 165 ml	400 - 300 - 165 ml
SERVICE LIFE	100 YEARS SERVICE LIFE	100 YEARS SERVICE LIFE	50 YEARS SERVICE LIFE	50 YEARS SERVICE LIFE
FIXING CONCRETE				
POST-INSTALLED REBAR (PIR) SEISMIC			✗	✗
FIXING MASONRY	✗			
SEISMIC FIXING				✗
SEISMIC MASONRY	✗			✗
FIRE RESISTANCE			✗	✗
CONCRETE CONDITION				
USE CATEGORY				

	E-PLUS	V-PLUS WINTER TROPICAL	HYBRID	POLY SF
RESIN MADE IN ITALY since 1992 STYRENE FREE CLP Classification	 RATIO 3 : 1	 RATIO 10 : 1	 RATIO 10 : 1	 RATIO 10 : 1
SIZE	1000 - 585 - 385 ml	400 - 300 - 165 ml	400 - 300 - 165 ml	400 - 300 - 165 ml
LOAD	 			
BASE MATERIALS				
INSTALLATION				
① OPEN TIME	 E-PLUS 20°C	 V-PLUS WINTER TROPICAL 20°C 0°C -20°C 20°C 50°C	 HYBRID 20°C	 POLY-SF 20°C
② CURING TIME	① 30 min ② 12 h	① 7 min 30' 25 min 2h 14 min 2 min ② 40' 1 h 40' 48 h 1 h 20 min	① 6 min ② 45 min	① 6 min ② 45 min
SERVICE TEMPERATURES				
SECTOR				
LEED TESTED				
A+ CERTIFIED				
EPD VERIFIED				
TEST REPORT		 		

BOSS 300

Per resine / For resin 300 ml
THRUST RATIO 26:1



BOSS 300 PRO

Per resine / For resin 300 ml
THRUST RATIO 29:1



BOSS 300 BAT LT

Per resine / For resin 300 ml
1 batteria/battery
14,4 V / 5,0 Ah



BOSS 300 BTR T

Per resine / For resin 300 ml
2 batterie/batteries
7,2 V / 1,5 Ah



BOSS 400

Per resine / For resin 400 ml
THRUST RATIO 26:1



BOSS 400 PRO

Per resine / For resin 400 ml
THRUST RATIO 29:1



BOSS 400 BAT LT

Per resine / For resin 400 ml
2 batterie/batteries
14,4 V / 5,0 Ah



BOSS 400 BTR

Per resine / For resin 400 ml
2 batterie/batteries
7,2 V / 1,5 Ah



BOSS 400 P-PN

Per resine / For resin 400 ml
Pressione di esercizio /
Working pressure 5/6 bar



BOSS 400 PNE

Per resine / For resin 400 ml
Pressione di esercizio /
Working pressure 5/6 bar



BOSS 2131 E-PRO

Per resine / For resin 385/585 ml
THRUST RATIO 35:1



BOSS 585 BAT PRO

Per resine / For resin 385/585 ml
2 batterie/batteries
20 V / 2,0 Ah



BOSS 585 E-BTR

Per resine / For resin 385/585 ml
2 batterie/batteries
7,2 V / 1,5 Ah



BOSS 2131 E-PN

Per resine / For resin 385/585 ml
Pressione di esercizio /
Working pressure 5/6 bar



BOSS 1000 PRO

Per resine / For resin 1000 ml
THRUST RATIO 30:1



BOSS 1000 E-PN

Per resine / For resin 1000 ml
Pressione di esercizio /
Working pressure 5/6 bar



ACCESSORIES FOR CHEMICAL ANCHORS ACCESSORI PER ANCORANTI CHIMICI

SCOV M

Metal steel brush
SCOV M Ø 14 ... 20



SCOV CN

Steel brush for connector
SCOV CN Ø 14 ... 42



PR-CN

Extension



CN-SDS

SDS connection



CN-S

Small wedge



CN-L

Big wedge



BCR S-L

Blower pump




MIXER



PR-MIXER

10x1000 / 10x500 / 10x380 / 10x200
Mixer extension




GF

Metal sleeve



GCC

Plastic sleeve

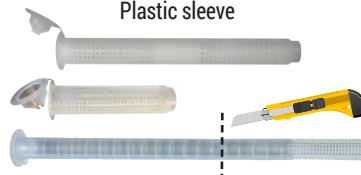

TP

Injection plug
TP Ø 18 ... 40




RESINA COLABILE EPOSSIDICA

CASTING EPOXY-BASED RESIN



STOCCAGGIO E CONSERVAZIONE
STORAGE AND CONSERVATION



BCR 5 K COL MIX EPOX

FLUID FORMULATION
GREY COLORED




BCR 5 K COL MIX EPOX RAL 1015

FLUID FORMULATION
WOOD COLORED



SCHIUMA POLIURETANICA

POLYURETHANE FOAM



BCF 750 TA B2 AUT




BCF 750 IS B1 AUT



BCF 750 FIRE MAN



STOCCAGGIO E CONSERVAZIONE
STORAGE AND CONSERVATION



BCF 750 B3 AUT

BCF 750 TC B3 AUT

BCF 750 TA B2 AUT

BCF 750 IS B1 AUT

BOSS 750 A

BOSS 750 EC

BCF SOLVENT

BCF 750 B3 MAN


BCF 750 TC B3 MAN

BCF 750 FIRE MAN



TASSELLI PASSANTI AD ESPANSIONE

THROUGHBOLTS

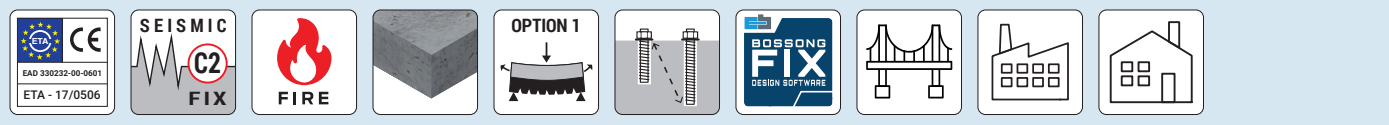

NWS-CE1

M8 - M10 - M12 - M16
M20 - M24 - M27
L [mm] 75 ... 300



NWS-CE1X4

M8 - M10 - M16 - M20
L [mm] 75 ... 165



! NWS-CE1 HDG

M10 - M12 - M16
L [mm] 90 ... 145



NWS-CE

M6 - M8 - M10 - M12
M14 - M16 - M20
L [mm] 60 ... 270




NWS-CEX2

M6 - M8 - M10 - M12
M16 - M20
L [mm] 60 ... 170



NWS-CEX4

M6 - M8 - M10 - M12
M16 - M20
L [mm] 60 ... 220



NWS

M6 - M8 - M10 - M12 - M14
M16 - M20
L [mm] 45 ... 280



! NWS-HDG


M6 - M8 - M10 - M12
M16 - M20
L [mm] 60 ... 200



! Su richiesta / On demand

TASSELLI A VITE PER CALCESTRUZZO

CONCRETE SCREWS

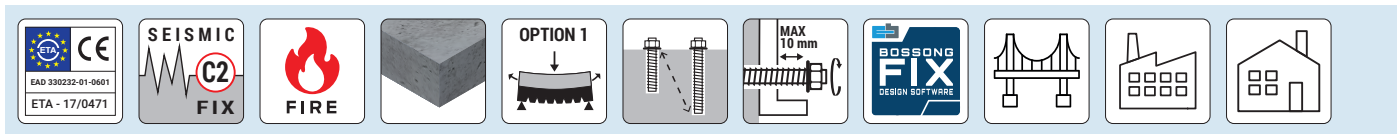

CLS-H CE

Ø 6 - Ø 8 - Ø 10 - Ø 12 - Ø 14
L [mm] 50 ... 160



CLS-S CE

Ø 6 - Ø 8 - Ø 10
L [mm] 50 ... 140



CLS-B CE

Ø 6
L [mm] 50 ... 100



CLS-I CE


Ø 6
L [mm] 35 / 55



M8 / M10

TASSELLI MECCANICI A PERCUSSIONE

DROP IN ANCHORS

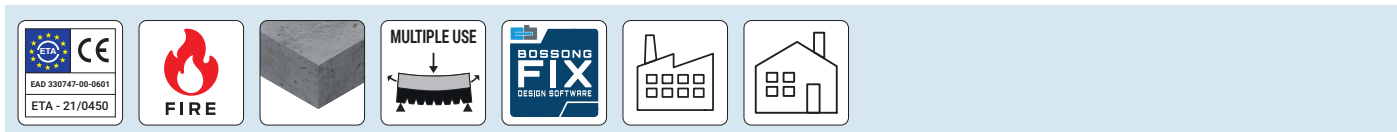

JB-CE

M6 - M8 - M10 - M12
L [mm] 25 ... 50



JBB-CE

M6 - M8 - M10 - M12
L [mm] 25 ... 50



PJ

Ø 5 ... Ø 20



TASSELLI MECCANICI LAMIERINO

EXPANSION ANCHORS



BPB-C

M6 Ø8 - M8 Ø10 - M10 Ø12
M12 Ø16
L [mm] 45 ... 155






BPB-TS

M6 Ø8 - M8 Ø10 - M10 Ø12
L [mm] 45 ... 100



TASSELLI FILETTATI INTERNAMENTE AD ESPANSIONE

THREADED INSIDE ANCHORS



FBR / FBRX2

M6 Ø10 - M8 Ø12
M10 Ø15 - M12 Ø18
L [mm] 45 ... 75



FBR-B

M6 Ø10 - M8 Ø12
M10 Ø15 - M12 Ø18
L [mm] 50 ... 100



FBR-RBD

M6 Ø10 - M8 Ø12
M10 Ø15 - M12 Ø18
L [mm] 80 ... 200



FBR-GC

M6 Ø10 - M8 Ø12
M10 Ø15 - M12 Ø18
Lc [mm] 65 ... 110



FBR-GA

M6 Ø10 - M8 Ø12
M10 Ø15 - M12 Ø18
Lc [mm] 65 ... 120



FBR-BF

M6 Ø10 - M8 Ø12
M10 Ø15 - M12 Ø18
L [mm] 70 ... 130



GR

M10 Ø15 - M12 Ø18
Lc [mm] 100 ... 130



BA

M6 Ø12 - M8 Ø14 - M10 Ø16
M12 Ø20 - M16 Ø24
L [mm] 40 ... 90



BAB

M6 Ø12 - M8 Ø14 - M10 Ø16
M12 Ø20 - M16 Ø24
L [mm] 50 ... 115



BAGC

M6 Ø12 - M8 Ø14 - M10 Ø16
M12 Ø20 - M16 Ø24
Lc [mm] 70 ... 155



BAGA

M6 Ø12 - M8 Ø14
M10 Ø16 - M12 Ø20
Lc [mm] 70 ... 120






BABF

M6 Ø12 - M8 Ø14 - M10 Ø16
L [mm] 40 ... 60



TASSELLI MECCANICI A GRANDE ESPANSIONE

EXPANSION ANCHORS



BRB

M6 Ø9 - M8 Ø11 - M10 Ø14
M12 Ø16 - M16 Ø20 - M20 Ø25
L [mm] 40 ... 180



BRTS

M6 Ø9 - M8 Ø11
M10 Ø14 - M12 Ø16 - M16 Ø20
L [mm] 45 ... 160



GCRB

M6 Ø9 - M8 Ø11 - M10 Ø14
M12 Ø16 - M16 Ø20
Lc [mm] 65 ... 160



GARB

M6 Ø9 - M8 Ø11
M10 Ø14 - M12 Ø16
Lc [mm] 70 ... 150



BRBX2

M6 Ø9 - M8 Ø11
M10 Ø14
L [mm] 45 ... 150



BRTSX2

M6 Ø9 - M8 Ø11 - M10 Ø14
L [mm] 45 ... 150



GCRBX2

M6 Ø9 - M8 Ø11 - M10 Ø14
Lc [mm] 75 ... 95




BRTS-TX 40

M8 Ø11
L [mm] 200 ... 300



VITI PER LEGNO

SCREWS FOR WOOD



VLS

Ø5 - Ø6 - Ø8 - Ø10 - Ø12 L [mm] 40 ... 600



VLTE

Ø6 L [mm] 40 ... 240



BATZ



VLTE-AP

Ø6 L [mm] 32 ... 240



VLTEX

Ø6.3 L [mm] 40 ... 200



VITI PER CALCESTRUZZO

SCREWS FOR CONCRETE



CLS

Ø5 - Ø6 - Ø8 - Ø10
L [mm] 30 ... 240



CLS-B

Ø5 - Ø6
L [mm] 50 ... 120




CLS-S

Ø5 - Ø6
L [mm] 35 ... 160



VITI PER ACCIAIO

SCREWS FOR STEEL



AP-TE

Ø 4.8 - Ø 6.3
L [mm] 19 ... 240



AF-TE

Ø 6.3
L [mm] 16 ... 130




BATZ



TASSELLI PROLUNGATI AD AVVITAMENTO

PLASTIC FRAME FIXINGS



JNS-PLUS

Ø8 - Ø10 L [mm] 80 ... 230



JNS-PLUS TE

Ø8 - Ø10 L [mm] 80 ... 230



JNS-PLUS TX

Ø10 L [mm] 80 ... 200



JNS-PLUS X4

Ø8 - Ø10 L [mm] 80 ... 230




JNS-PLUS TE X4

Ø8 - Ø10 L [mm] 80 ... 230



TASSELLI A PERCUSSIONE

HAMMER-IN FRAME FIXINGS



JNS-P

Ø6 - Ø8 - Ø10 L [mm] 40 ... 220



JNS-P X2

Ø6 - Ø8 L [mm] 40 ... 100




JNH-CE

Ø5 - Ø6 - Ø8 L [mm] 30 ... 140



TASSELLI PER ISOLAMENTO

INSULATION FIXINGS



IS-CE PP

Ø 10 L [mm] 70 ... 260



IS-CE PF

Ø 10 L [mm] 70 ... 260



TDX

 Ø 90
 Ø 140


CHIODATRICI A SPARO / CHIODI / CARTUCCE

POWDER ACTUATED TOOLS / NAILS / LOADS



BOSS-8000



BOSS-8000-M75



BOSS-4000



BOSS-6000




BOSS-6000-M35



BOSS-3500



6,8/11-ML



KDH

L [mm] 20 ... 95



KDHM

L [mm] 20 ... 75



KDHR

Ø 15 - Ø 22 - Ø 36

L [mm] 30 ... 60



KISL

Ø 30 - Ø 60

L [mm] 40 ... 65



KDC

Ø 47
L [mm] 55 ... 75



KD

L [mm] 25 ... 75



KDRB

Ø 22

L [mm] 30 ... 60



KDHMC

L [mm] 47 ... 62



KR

L [mm] 20 ... 100



CHIODATRICI A GAS / CHIODI

GAS TOOLS / NAILS



BOSS G-42



G-40

L [mm] 17 ... 38



BOSS G-90W



**R-DPK
R-DRK
R-DRG**

L [mm] 51 ... 90





HEADQUARTER

Via E. Fermi, 49/51 (Z.I.2)
24050 GRASSOBBIO (BG) - Italy
Tel +39 035 3846 011
info@bossong.com

LOGISTIC CENTER

Via G. Falcone 1
24050 ZANICA (BG) - Italy
Tel +39 035 0075712

www.bossong.com

